




产品说明书

Product manual

产品简介:

H106是一款高灵敏度点声源音箱，采用高灵敏度钕磁低音单元内置两分频设计，灵敏度达到97dB。饱满厚实的中频搭配小巧美观的箱体，非常适合应用于会议室及小型报告厅。

H106提供吊装/支架等多种固定安装方式，适用于多种场合的应用安装。

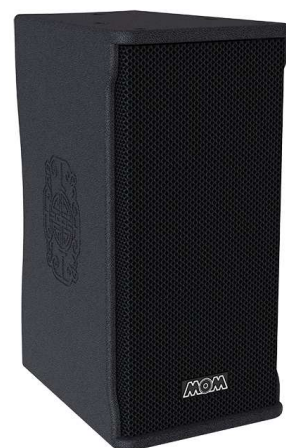

(示图供参考，可定制其他颜色)

H106 is a high-sensitivity point sound source speaker, which adopts a high-sensitivity neodymium magnetic bass unit with a built-in two frequency division design, and the sensitivity reaches 97dB. The plump and thick medium frequency with small and beautiful box is very suitable for meeting rooms and small lecture halls.


H106 provides a variety of fixed installation methods such as hoisting / support, which is suitable for application and installation in a variety of occasions

Technical Specifications:


箱体: Physical	
木箱材料: Enclosure Material	优质桦木板
表面喷涂: Finish	黑色水性漆(可定制色)
防水等级: Environmental	1px3
连接器: Connectors	2 x Neutrik NL4
安装: Suspension/Mounting	壁挂/吊装/支撑
产品尺寸: Dimensions	(W)190.3mm × (H)385mm × (D)267.5mm (W)7.49ins × (H)15.15ins(D)10.53ins
净重量: Net Weight	8kg(17.63lbs)

技术指标: Technical data:	
频率响应(+/-3dB): Frequency Response(+/-3dB)	90-19000Hz
频率响应(-10dB): Frequency Range(-10dB)	85-20000Hz
推荐高通滤波器: Recommended High-Pass Protection Filter	85Hz最小12dB/倍频程滤波器
覆盖角度(-6dB): Dispersion	H90°×V 60°
额定(AES)/峰值功率: Power handling capacity(RMS/peak 10 ms)	150W/600W
灵敏度: Sensitivity(SPL/1W@1m)(2)	97dB
最大声压级 (SPL@1m) 峰值: Calculated Maximum SPL@1m,peak	125dB
扬声器: Transducers	
低音扬声器: Low Frequency	1 × 6.5"低音扬声器(1.5"voice coil)
高音驱动器: High Frequency	1 × 钕磁高音驱动器(1.4"voice coil)
额定阻抗: Nominal Impedance	8Ω


Dimensions

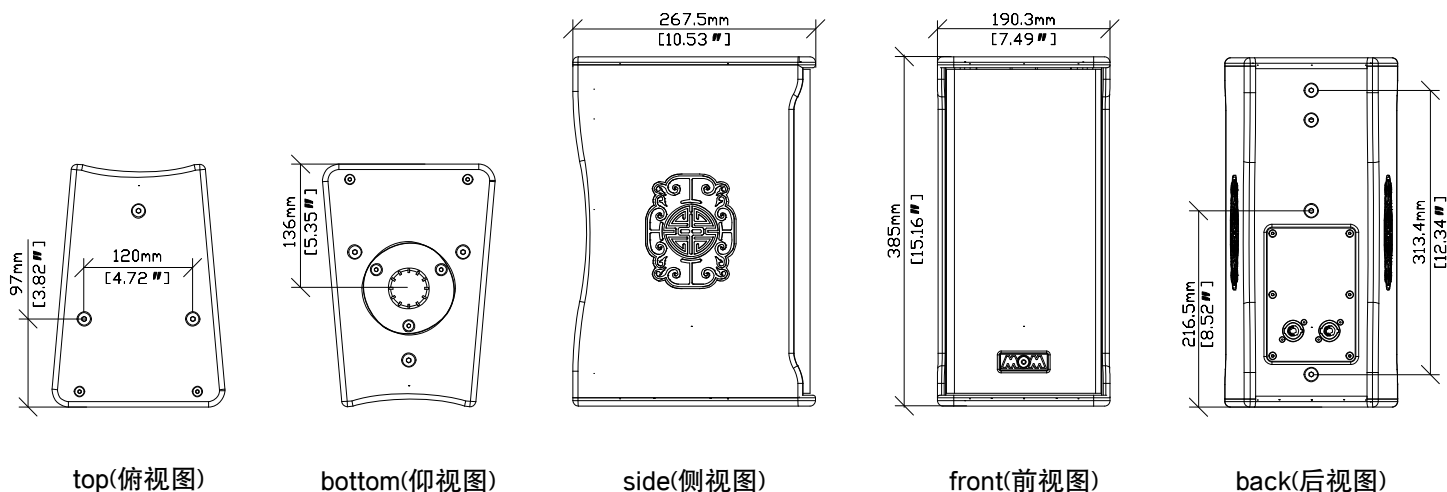

Frequency Response

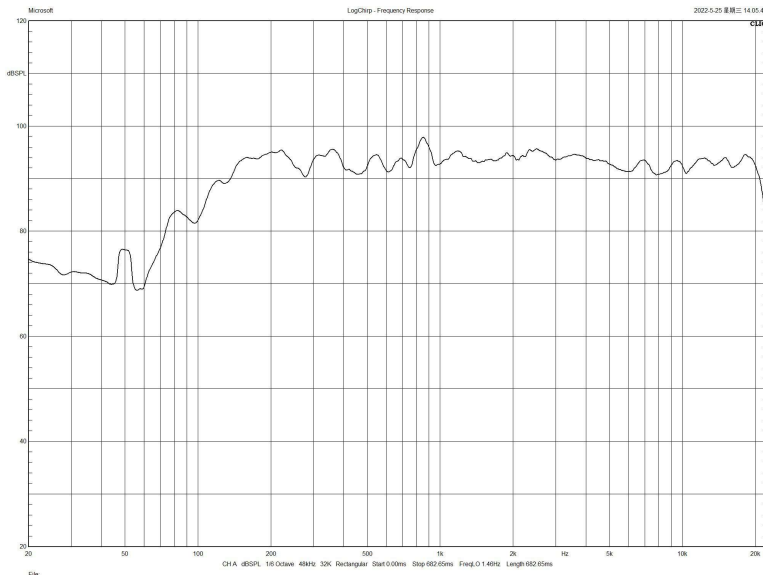

Distortion

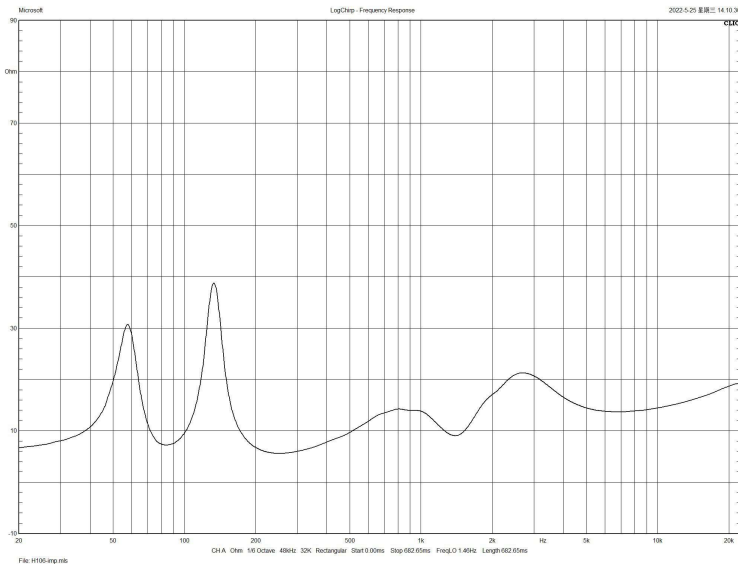

注悉：

1.以上频响曲线及参数均在消声环境中测得。

2.相关测试执行以下标准：

GB/T9397-2013《直接辐射式电动扬声器通用规范》。

GB/T12060.5-2011《声系统设备 第5部分：扬声器主要性能测试方法》。

3.额定功率按照AES标准2小时连续时间。

4.本公司保留最终解释权。