



产品说明书

Product manual

产品简介:

H110是一款无源二分频音箱，采用350W大功率高灵敏度10寸低音单元搭配1.7寸高音驱动器设计.在声音表现上，延续H系列的声音特点，高音细腻，中频饱满人声清晰。

H110可以在中小型环境中作为主扩声音箱使用，也适合在大型扩声环境中用作补声音箱使用。

H110有吊装/支架等多种固定安装方式，适用于多种场合的应用安装。



(示图供参考，可定制其他颜色)

H110 is a passive dichotomy speaker designed with 350W high power and high sensitivity 10 inch bass unit and 1.7 inch tweeter driver In terms of sound performance, it continues the sound characteristics of H series, with fine treble, full mid frequency and clear vocal.

H110 can be used as the main loudspeaker in small and medium-sized environments, and it is also suitable to be used as the supplementary loudspeaker in large-scale environments.


H110 has a variety of fixed installation methods such as hoisting / support, which is suitable for installation in a variety of occasions.

Technical Specifications:


箱体: Physical	
木箱材料: Enclosure Material	优质桦木板
表面喷涂: Finish	黑色聚脲漆
防水等级: Environmental	1px3
连接器: Connectors	2 x Neutrik NL4
安装: Suspension/Mounting	吊装/支撑
产品尺寸: Dimensions	(W)290mm × (H)510mm × (D)340mm (W)11.41ins × (H)20.07ins(D)13.38ins
净重量: Net Weight	18.5kg(40.78lbs)

技术指标: Technical data:	
频率响应(+/-3dB): Frequency Response(+/-3dB)	65-18000Hz
频率响应(-10dB): Frequency Range(-10dB)	60-19000Hz
推荐高通滤波器: Recommended High-Pass Protection Filter	60Hz最小12dB/倍频程滤波器
覆盖角度(-6dB): Dispersion	H80°×V60°
额定(AES)/峰值功率: Power handling capacity(RMS/peak 10 ms)	350W/1400W
系统灵敏度: Sensitivity(SPL/1W@1m)(2)	97dB
最大声压级/峰值 (SPL@1m) : Calculated Maximum SPL@1m,peak	128/134dB
扬声器: Transducers	
低音扬声器: Low Frequency	1 × 10"低音扬声器(2.5"voice coil)
高音驱动器: High Frequency	1 × 高音驱动器(1.7"voice coil)
额定阻抗: Nominal Impedance	8Ω


Dimensions

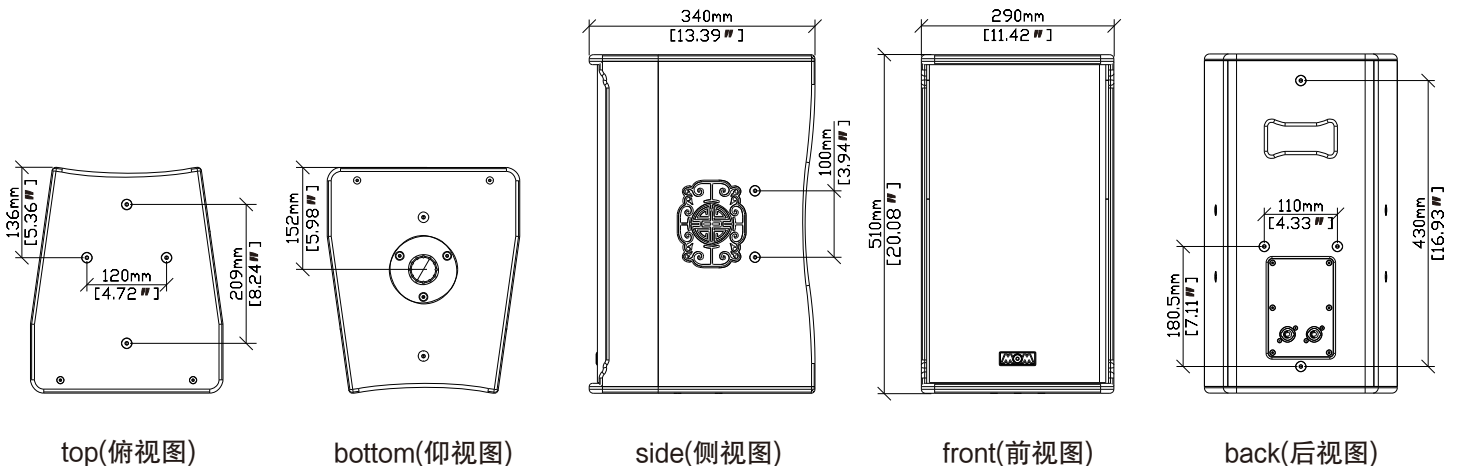

Frequency Response

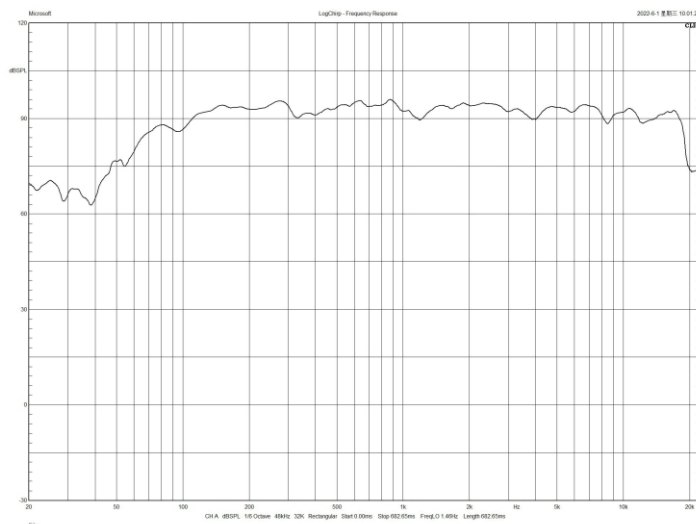

Distortion

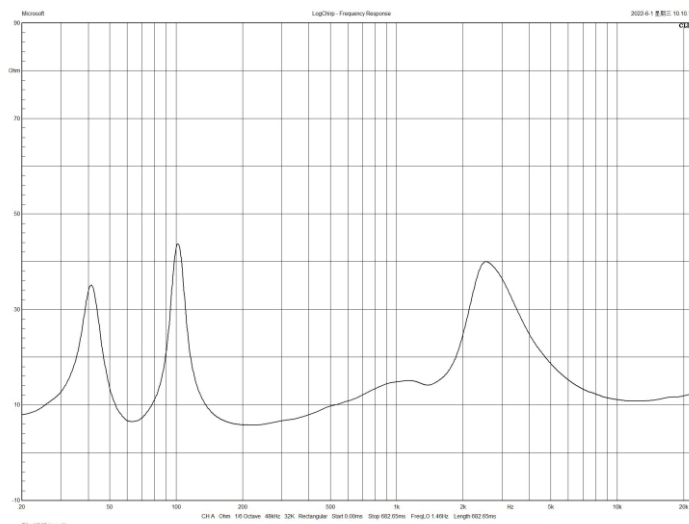

注悉：

1.以上频响曲线及参数均在消声环境中测得。

2.相关测试执行以下标准：

GB/T9397-2013《直接辐射式电动扬声器通用规范》。

GB/T12060.5-2011《声系统设备 第5部分：扬声器主要性能测试方法》。

3.额定功率按照AES标准2小时连续时间。

4.本公司保留最终解释权。